

Description

The XTXIP control panel is an extended temperature, wireless, battery operated, hybrid alarm system. It is designed for residential, small business security applications, as well as both indoor and outdoor commercial applications (construction sites, cell towers, remote sites, substations...) where the location of the panel is unconditioned but protected from the elements and has Ethernet (IP) or GPRS connection.

The panel includes the choice of many different configuration options including the following:

- > Arming by Videofied Peripherals, Schedule, Virtual Keypad, or existing alarm system.
- > Power the system by Power Supply + Battery Backup or standalone battery (up to 4 years).
- > Communicate over Ethernet + Cellular Backup, Ethernet Only, or Cellular Only.
- > 24 wireless zones for Videofied Peripherals plus 3 Programmable input zones for hardwired devices.
- > Choose between the Internal RF antenna or switch to an External RF antenna option.
- > 2 Hardwired outputs.
- > Virtual Keypad arming and disarming from Smartphone.
- > Operating temperature from - -20 to +68C


Security

With two modes of transmission, Ethernet and GPRS, the XTIP panel ensures maximum safety. In case of Ethernet connection loss, the XTIP panel will switch to GPRS (if enabled) to transmit alarms and videos.

Supervised Wireless Technology

The XTXIP, along with all Videofied devices, utilize patented S2View® - Spread Spectrum, AES Encrypted Wireless technology, providing optimum signal integrity and security. Bi-directional RF communication paths between all system devices and the system control panel assure high signal reliability. Integrated RF and GPRS connections allow for addition of external antennas for increased performance.

The panel supervises every device (excluding the remote keyfob) to validate current open/close state, tamper condition, serial number, date of manufacture, firmware revision, and battery status.

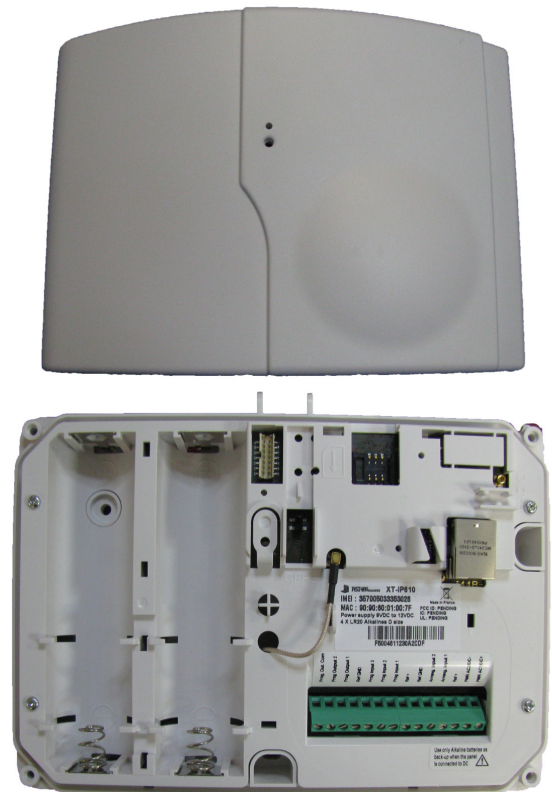

*** When using the XTIP panel with the Ethernet connection or SMS Arming you must use a 12v 2A Power Supply with 4 Alkaline battery backup (PP4)***

Control Panel Videofied **XTXIP**

Compatibility The XTXIP works with all the following Videofied wireless devices:



Indoor MotionViewer - integrated PIR motion detector, night vision digital camera, infrared illuminators. MotionViewers detect intruders and capture a 10 second video of the intrusion which is sent to the panel over RF.



Outdoor Badge Reader with Prox-Tag - Allowing Arming/disarming of the system from outside the premises. The Prox-Tags are standard Mifare badges.



Door Contacts - detect door and window open/close activity. An external input allows a wired connection from standard security switches and detection devices outputs.



Outdoor MotionViewer - integrated PIR motion detector, night vision digital camera, infrared illuminators. MotionViewers detect intruders and capture a 10 second video of the intrusion which is sent to the panel over RF.



Exterior Sirens/Strobes - provide alarm sounds and visual identification of alarm site for responding authorities.



Remote Keyfobs - allow limited system operation and panic alarm capability in a portable, convenient package.

Features

- > Video Verification - video resolution of 320 x 240 pixels, 0 lux sensitivity, 5-frames per second for approx. 10 seconds total recording time. 220K MPEG file.
- > Up to 25 Wireless zones/devices
- > Mapping feature to trigger a video upon activation of a programmable input
- > 3 programmable inputs
- > 2 programmable outputs to activate third party devices on site (smoke cloak, gates, strobes, sirens, etc...)
- > 2 dedicated on-board connectors to extend the GPRS coverage and the radio coverage
- > 4 Areas with 2 special arming mode and partitions
- > 20 user codes or Badges
- > 4.000 Events history log
- > Power : 12VDC with Alkaline batteries for back-up (up to one month of back-up)
- > Built-in RJ45 for Ethernet transmission to report to your Monitoring Station in the Frontel protocol
- > Built-in GPRS transmitter to report to your Monitoring Station in the Frontel protocol

Electrical Data

Power Requirements (Option 1) Must be used when using Ethernet Communication or SMS-	12v DC / 2A
Back up	4 Alkaline 1.5v DCell, LR20
Battery life (estimated)	Up to 1 year
Power Requirements (Option 2) - Will not work with Ethernet or SMS-	4 SAFT LSH20 Batteries
Battery life	Up to 4 years
RF technology	S2View®
Radio type	Spread Spectrum Bidirectional
Operating frequency	920Mhz
Transmission security	AES encryption algorithm
Supervision	Panel polls devices every 8 minutes
Antennas	Integrated
Tamper detection	Base and Cover Tamper
Operating temperature	-20 to +68C
Maximum relative humidity	95%, non-condensing
UL listings	1023 (applied for)
Wired Arming Inputs	2
Dry Contact option	Yes
Inputs Voltage	2VDC (15v max)
Inputs Current	2 mA max
Programmable Wired Inputs	3
Dry Contact	Yes
Inputs voltage	12VDC (15v max)
Programmable Wired Outputs	2
Max switching voltage	220VDC / 250VAC
Max switching current	4A
Max switching power	120VA
Programming	Alphanumeric Keypads or Frontel Installer Software
Devices per system	24 per system + 1
Access Codes	19 maximum + 1
Security Levels	3
Arming modes	2
Areas	4 (area1 predefined from factory entry/exit delayed. Areas 2,3 & 4 programmable)

Communication Formats	GPRS / Ethernet
Protocols	Frontel Only
Installer Codes	One (for system programming only)
Special arming modes	4 (Area 1 predefined)
Communication Formats	IP
Communicator type	GPRS and Ethernet
IP Stack	IP, TCP/IP
Remote Maintenance	Frontel Installer Protocol only
Video Transmission	By Frontel protocol to Central Monitoring Station
Video Format	MPEG video file
Video file size	220 Kbytes
Video Framing	5 frames/second
Image format	JPEG
Image Resolution	320x240 Pixels
History/Event Log	4,000 Stored events

Physical Data

Material	ABS-ULVO
Dimensions	(LxWxD) 9" x 7" x 2-1/16"

Installation/Mounting

Control Panel/Base	Two screws secures control panel cover to base. Three screws secure control panel base to wall
External Antenna	2 Built in MMCX connectors to extend the GPRS and RF range

AUSTRALASIAN SALES - HEAD OFFICE

1/11 Exeter Way
Caloundra
QUEENSLAND, Australia

Hot line : 1300 46 44 55 Or +61(0) 7 5341 8843
Fax : +61 (0) 7 5492 5091
www.videofied.com.au
email : support@videofied.com.au

www.videofied.com.au

www.videofied.com